




The **4ipnet HSG260** is the most economical yet feature-rich **Wireless Hotspot Gateway**, targeting mini-size stores who want to provide small, single-point wireless Internet access service. The HSG260 is a perfect choice for beginners to run hotspot businesses. It does not cost a fortune to buy a pile of equipment, nor does it take the skills of an expert to glue multiple applications out of multiple freeware.



Feature-packed for hotspot operation, HSG260 comes with **built-in 802.11n/b/g access point, web server and web pages for clients to login, easy logo-loading for branding a hotspot store, simple user/visitor account management tool, payment plans, external credit card gateways, traffic logs, IP sharing** and etc. Equipped with 4ipnet's patent-pending **4ipWES (Press-n-Connect)** technology, the HSG260 is able to establish an automatic WDS link with up to 2 access points at the touch of a button. Extending wireless network coverage is a breeze. To open a hotspot store is at finger tips with HSG260 connecting to the Internet pipe via ADSL/Cable/Satellite modem. HSG260 also brings in an extra advantage - the wall-mountable, dust-proof (IP50) metal housing.

For a **self-proprietor** who owns one or several small shops, serving wireless Internet service is no magic via HSG260. Many auto-service shops and dental clinics find an HSG260 in service makes their customers' waiting time a breeze. Small coffee shops can offer time-based hotspot service by compliment coupons or paid by hours at ease. For small professional offices such as accounting or law firms who demand high-level network security, a standalone HSG260 enables the offices to provide managed Internet service to their clients or visitors in an isolated fashion, free of charge, while securely preventing unauthorized access to the intranet.

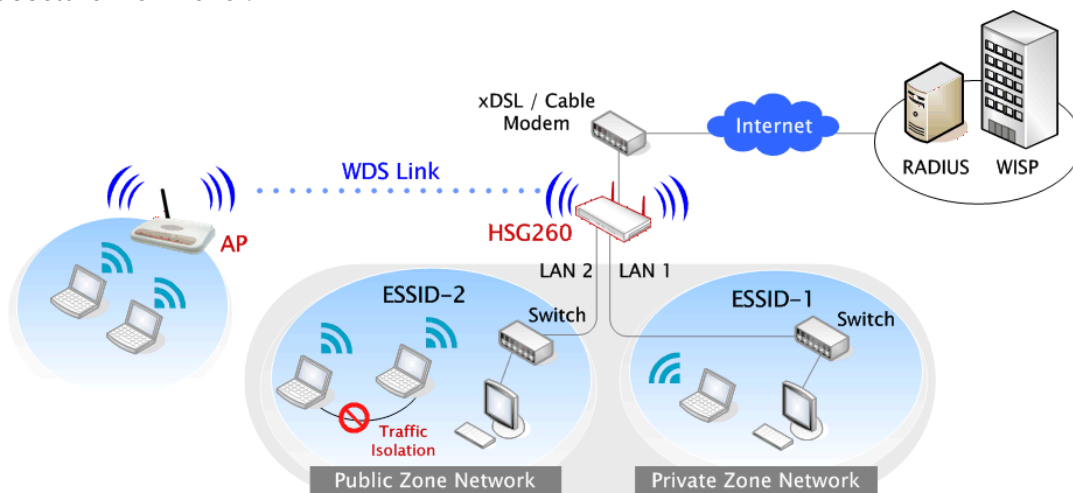

## FEATURES & BENEFITS

### 2.4GHz 2 x 2 MIMO Field Replaceable Antenna & IEEE 802.11n/b/g

- The antenna diversity design enhances the connection reliability to improve data transmission capability
- Two detachable antennas for optimal wireless coverage and field replacement flexibility
- Equipped with a high-speed IEEE 802.11n/b/g wireless network interface, transmission rates up to 300Mbps

### Easy Installation and Operation

- Support various broadband deployment options (T1, DSL, Cable) via static IP, DHCP and PPPoE
- Integrated access point enables Wi-Fi access and eliminates the need for additional device
- Built-in user database provides sufficient account capacity for different operation scenarios
- Work on-demand account generator to provide user accounts for visitor-based, on-demand operations
- Quick Button feature is a purposely built hardware button designed for generating & printing an account from a pre-defined billing plan. Simply connect a PRT100 to the Console port and begin your hotspot service without further configuration with Quick Button

### Integrated Security Features

- Standard-based data encryption and user authentication: WEP, WPA, WPA2, IEEE 802.1X
- Secure guest and administrator access using web-based login and administration over SSL
- Configurable packet filtering policies enhance data traffic security
- 4ipWES (Press-n-Connect) with push button enables quick/auto WDS link
- Built-in DoS protection prevents malicious hackers from collapsing the network

### Effective User Management

- Complete authentication mechanism blocks unauthenticated users from gaining access to the network
- Role-based and policy-based control policies enhances the protection against malicious users
- "On-line user list" monitors real-time status of each individual user
- Allow session expiration control for On-demand users by time basis

### Flexible Accounting and Billing

- Programmable billing profiles allow operators to customize the billing plans for On-demand users
- Bandwidth control enables class of service for different levels of users and maximize profits
- Detailed per-user traffic history log for analysis and record keeping

## Networking

- Support IPv4/IPv6 dual stack
- Support Router, NAT mode
- Support static IP, DHCP and PPPoE on WAN interface
- Support IP Plug and Play (IP PnP)
- Built-in DHCP Server and support DHCP Relay
- Support NAT:
  - (1) DMZ Server Mapping
  - (2) Public Accessible Server
  - (3) Port and IP Redirect
- Configurable static route
- Support email service via designated email server
- Support Walled Garden
- Support Walled Garden Ad List to post Advertisement website links on user login portal page
- Support MAC Address Pass-Through
- Support Ethernet connection to external terminal servers

## Security

- Support security standards: WEP (64/128/152 bits), WPA/WPA2-PSK, IEEE 802.1X, and TKIP & AES Cipher auto negotiation
- Support VPN Pass-Through (PPTP)
- Support DoS attack protection
- Support Layer 2 isolation
- Support MAC Access Control List
- Configurable user Black List
- Allows MAC address and user identity binding for local user authentication

## User Management

- Support 500 local accounts
- Support 2000 on-demand accounts for visitors
- Simultaneous support for multiple authentication methods (Local, RADIUS\*2, and On-demand)
- Support local account roaming
- Policy-based access control (per-role assignments based on Schedule Firewall Policies, Routing, Login Schedule, Bandwidth and Session)
- User Session Management:
  - (1) SSL protected login portal page
  - (2) Support multiple logins with one single account
  - (3) Session idle timer
  - (4) Session and account expiration control
  - (5) Login time frame control
  - (6) Session limit
- Import/Export local and on-demand accounts from/to a CSV file

## Monitoring and Reporting

- Online status monitoring of users
- Uplink (WAN) connection failure alert
- Support SYSLOG server for diagnosis and troubleshooting
- Support User Logs for traffic recording
- Support user traffic session (TCP/UDP) logging
- Event Log

## System Administration

- Web-based management UI
- Customizable login and logout portal page
- SSH remote management
- Remote firmware upgrade
- Console management
- NTP time synchronization
- Backup and restore the system configuration
- SNMP v1/v2c
- 4ipWES (Press-n-Connect) button for WDS Easy Setup

## Accounting and Billing

- Provide billing plans for On-demand accounts
- Various on-demand account types: Usage, Duration, Volume, and Hotel Cut-off
- Session expiration control for On-demand accounts
- Detailed per-user traffic history based on time for both local and On-demand accounts
- Traffic history report in an automatic email to administrator
- Support credit card payment via external payment gateway (Authorize.Net, PayPal, SecurePay, WorldPay)
- Support RADIUS accounting
- Support RADIUS VSA for volume-based quota of an external RADIUS server
- On-demand account batch creation
- Send automatic e-mail to report User Log, on-demand User Log, and Monitor IP status respectively

## Wireless Radio Specifications

- Wi-Fi standard: IEEE 802.11n/b/g in 2.4GHz frequency band
- Modulation: OFDM, DSSS, CCK
- Wireless Interface: 1 x 802.11 n/b/g (300/11/54 Mbps)
- 2 x 5dBi detachable (SMA Connector) field-replaceable Antenna
- RF output power: up to 100mW
- Number of multiple SSIDs: 2
- Number of WDS links: 2

## Hardware Specifications

- Metal case compliant with IP50 Standard
- WAN Port: 1 x 10/100/1000 Base-T
- LAN Port: 4 x 10/100/1000 Base-T
- Console Port: 1 x DB9
- USB Port: 1
- Quick Button x 1
- LED Indicators: 1 x Power, 1 x Status, 1 x WLAN, 1 x WAN, 4 x LAN, 1 x WES, 1 x USB

## Physical and Power

- Power adaptor (included)
  - (1) AC Input: 100~240 VAC, 50~60 Hz
  - (2) DC Output: 5V, 2A
- Form factor: Wall Mountable
- Dimensions (W x D x H): 8.7" x 5" x 1.3"  
(220 mm x 127 mm x 33 mm)
- Weight: 1.8 lbs (0.82 kg)

## Environment

- Operation Temperature: -30 ~ 70 °C (-22 ~ 158 °F)
- Storage Temperature: -40 ~ 85 °C (-40 ~ 185 °F)
- Operation Humidity: 10% ~ 80% (Non-condensing)
- Storage Humidity: 5% ~ 90% (Non-condensing)

## Certifications

- FCC, CE, RoHS compliant

## Package Contents

- 4ipnet HSG260 main unit x 1
- CD-ROM (User's Manual and QIG) x 1
- Quick Installation Guide (QIG) x 1
- Power Adaptor x 1
- Detachable Antenna x 2
- Console Cable x 1
- Ethernet Cable x 1

**\*\* Specifications subject to change without notice**